

數位萬用表 Digital Multimeters

DM3000 Series Digital Multimeters

Max. : 2,200,000 Count




產品特色


- ◆ 雙螢幕顯示功能
- ◆ 電壓準確度 0.015%/年
- ◆ 10,000 rdgs/s 測量速率
- ◆ Pass / Fail 功能
- ◆ 標準感測器配置

Function	Range	DM3058	DM3058E	DM3068
1Year Accuracy Specifications $\pm$ (% of reading + % of range) (Tcal 23°C $\pm$ 5°C)				
DC Voltage	200.000mV ~ 1000.00V	0.015 + 0.003		0.0035 + 0.0006
DC Current	200.000uA ~ 10.0000A	0.055 + 0.005		0.030 + 0.003
AC Voltage (RMS)	200.000mV ~ 750.000V	0.2 + 0.05		0.06 + 0.04
AC Current (RMS)	200.0000uA ~ 10.00000A	0.30 + 0.10		0.10 + 0.04
Resistance	200.000 Ω ~ 100.000M Ω	0.020 + 0.003		0.010 + 0.001
Diode Test	2.000V/1mA	0.05 + 0.01		0.010 + 0.020
Continuity Test	2000.0 Ω /1mA	0.05 + 0.01		0.010 + 0.020
Period/Frequency	3Hz-1MHz (200mV ~750V)	0.01+ 0.003		0.007
Capacitance	2.000nF ~ 100.0mF	1+0.5		1 + 0.3
Max. Reading Speed		123 rdgs /s		10000 rdgs /s
Volatile Memory		2k readings of history records		512k readings of history records
Remote Command		RIGOL · keysight · FLUKE		
Size		107.0mm(W) × 231.6mm(H) × 290.5mm(D)		
Weight		2.5 kg		3.2 kg


6 ½位元讀數

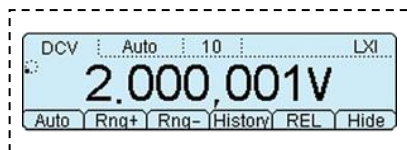

趨勢圖顯示

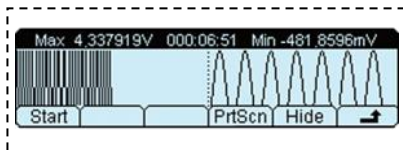

統計分析功能

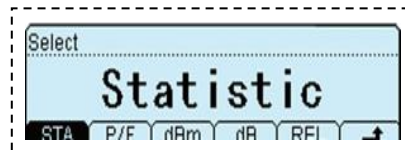

Standard Accessories

Order Information	Order No.
Power Cord	-
Two Test Leads (black and red)	-
Two Alligator Clips (black and red)	-
USB Cable	CB-USB-150
Four Spare Fuses (two kinds):	-
2 AC, 250 V, T250 mA fuses	-
2 AC, 250 V, T125 mA fuses	-
Quick Guide	-

Optional Accessories

Order Information	Order No.
Kelvin Test Clip	-
RS232 Cable	-
Rack Mount Kit	RM-DM-3